



# General Information For PLCC

## GENERAL INFORMATION


1. Luminous intensity is measured with an accuracy of  $\pm 11\%$ .
2. Wavelength binning is available for Tri-color Multi DIMILED. Please contact us for detail information.
3. Special requirements such as  $V_f$  binning could be implemented for Tri-color Multi DOMILED upon customers' request.

## STANDARD PACKAGE

1. DOMILED, Z-Bend DOMILED and Power DOMILED: *2000pcs per reel.*
2. BIKINI, Micro BIKINI: *3000pcs per reel.*
3. NovaLED: *1000pcs per reel.*
4. Due to the multiple bins for Multi DOMILED, the standard packing may come in quantity of 500, 750, 1000, 1250, 1500, 1750 & 2000pcs per reel.

## RECOMMENDED SOLDERING PROFILE

IR-REFLOW (ACC. TO IPC 9501)

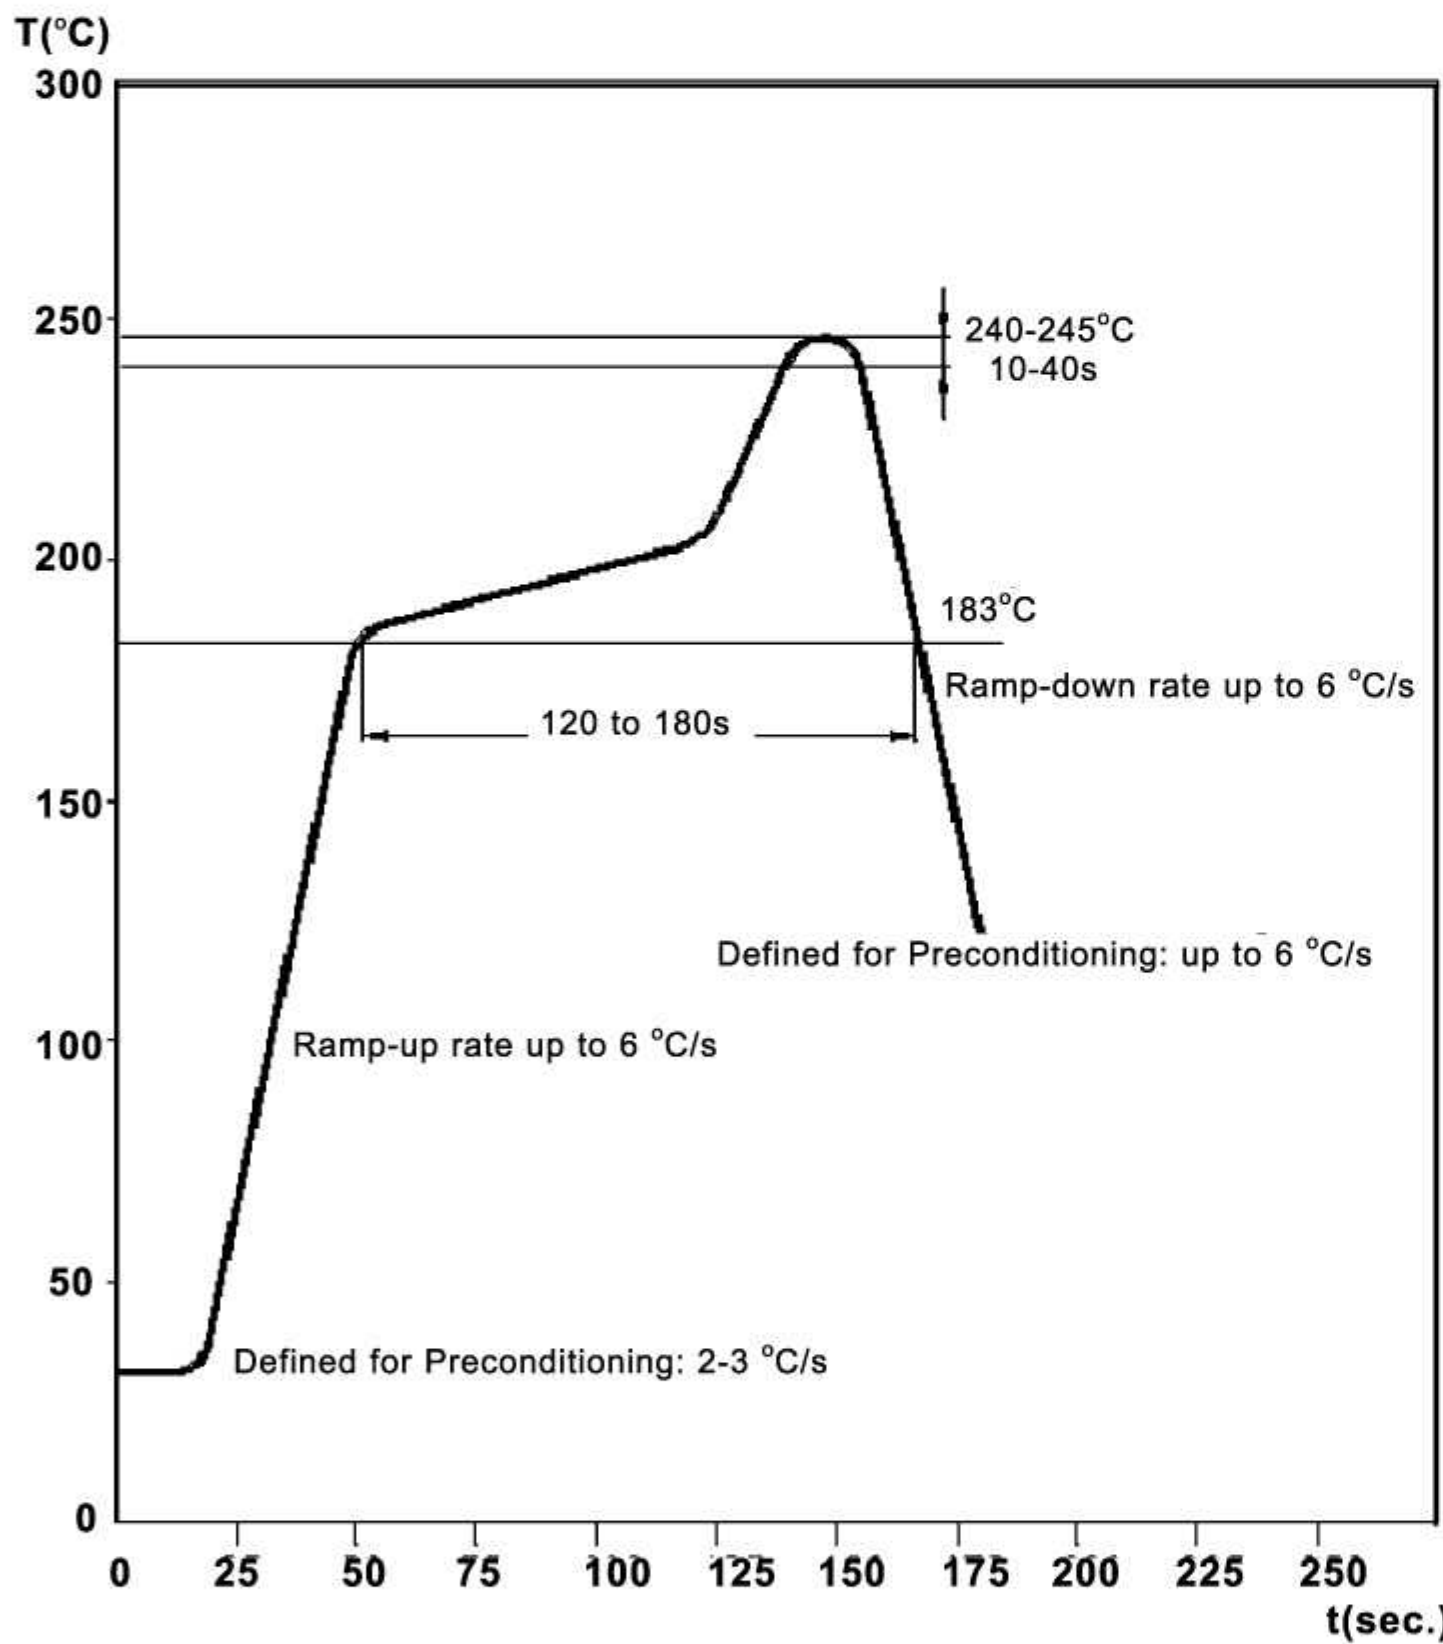

TTW (ACC. TO CECC 00802)

