




Receiver Module Series

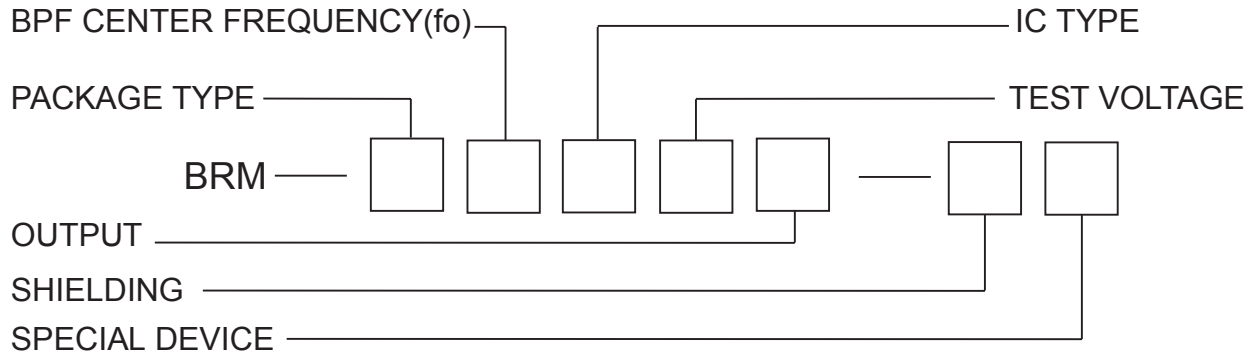

PACKAGE TYPE

- 1: Small size standard side view (Molding Type)
- 2: Surface Mounting Devices (SMD Type)
- 3: Traditional pack (PCB Type)
- 4: Standard view (Encapsulate Type)

BPF CENTER FREQUENCY (f_o):

- 0: 38.0KHz
- 1: 33.0KHz
- 2: 40.0KHz
- 3: 56.0KHz
- 4: 36.7KHz

Ic Type

Test Voltage

- 0: $V_{cc}=5.0V$
- 1: $V_{cc}=3.0V$
- 2: $V_{cc}=2.4V$

PIN FUNCTIONS

SHIELDING TYPE

SPECIAL DEVICE

- FBxx: Form Leads
- LCxx: Lead Cut